



Installation Guide



Go to **august.com/install**
to watch a video version
of this installation guide.

Welcome!

This guide will get you up and running with your August Smart Lock. Installation generally takes less than 15 minutes. If you have any trouble, please check our support section (**[august.com/support](https://www.august.com/support)**), contact our installer network (**[august.com/installers](https://www.august.com/installers)**) or call 844-AUGUST1 (284-8781) for help.

Preparation

Make sure your existing deadbolt is compatible with the August Smart Lock. Only standard deadbolts are supported. Use our compatibility assistant to double-check: **august.com/compatibility**

Compatibility: **YES**



◀ Standard

Deadbolt is mounted and operates independently of the door handle.

◀ Tools needed

You will need a standard Phillips screwdriver.

Compatibility: **NO**



Integrated Lock & Handle

Handle and lock thumb-latch are both mounted together on a metal plate



Mortise

An integrated door handle and deadbolt in a single metal unit



Rim Cylinder

Mounted on the inside, on top of the door and door jamb


Alternately, we have a network of installers who can help with installation.

august.com/installers

Package Contents



1 August Smart Lock
(4 AA Batteries Pre-installed)




1 Adhesive Strip
(Included Inside Envelope)



4 Adhesive Rubber Bumpers
(Included Inside Envelope)




3 Adapters

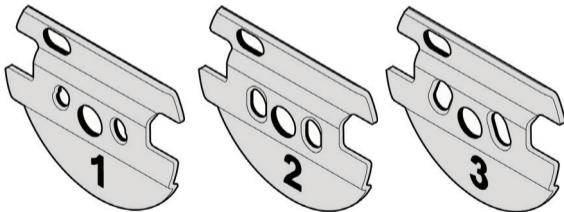

3 Mounting Plates

Installation Overview

Before Installation

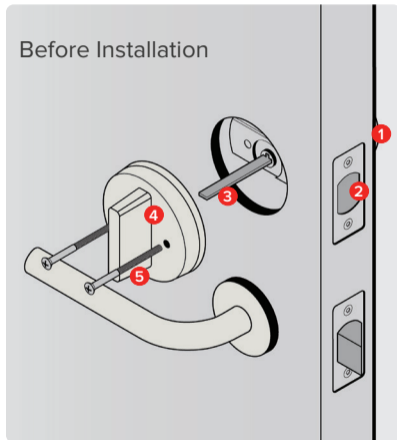


◀ Before:

- 1 Key Hole
- 2 Deadbolt
- 3 Tail Piece
- 4 Thumb-latch
- 5 Screws

After: ▶

- Key Hole 1
- Deadbolt 2
- Tail Piece 3
- Mounting Plate 4
- Screws 5
- Tail Piece Adapter 6
- August Smart Lock & Face Plate 7

After Installation

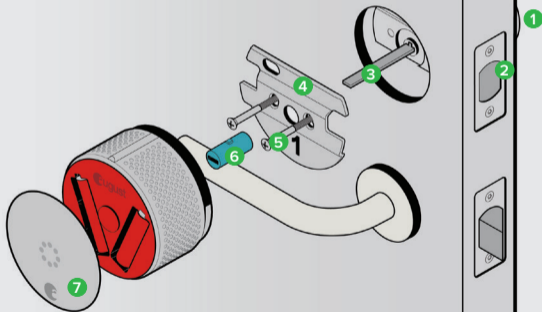


Step 1:

Prepare existing deadbolt.

Affix the supplied adhesive strip over the key hole, securing it to the exterior side of your door. This should hold the key hole in place when you remove the thumb-latch on the inside of the door.

On some doors, such as those with glossy paint, the included tape may not be strong enough. In this case you should apply additional stronger tape to ensure that the key hole stays in place. Use caution. Some types of tape, such as duct tape, may damage the paint on certain types of doors.

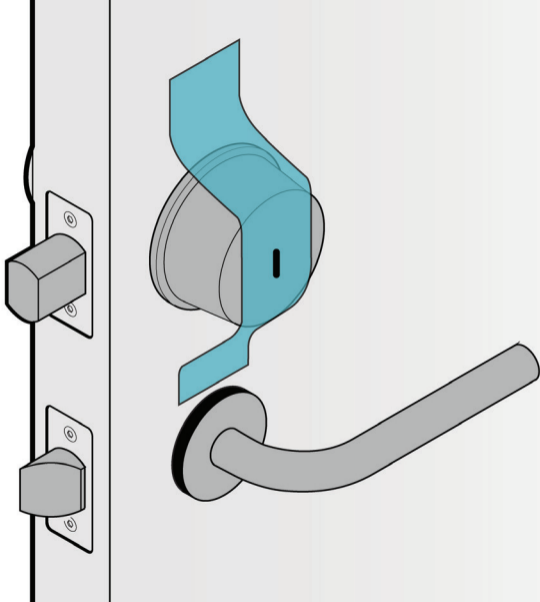

Step 2:

Remove your existing thumb-latch.


- A** Position your thumb-latch so that you can unscrew the existing screws on your deadbolt.

Remove the screws entirely from the deadbolt and keep them to assist in the next step.


After removing the screws, be sure to unlock your deadbolt before removing the thumb-latch.

- B** Your thumb-latch may include an additional back plate underneath it. If so, remove the back plate. Use the back plate and the longer screws for the next step.

A

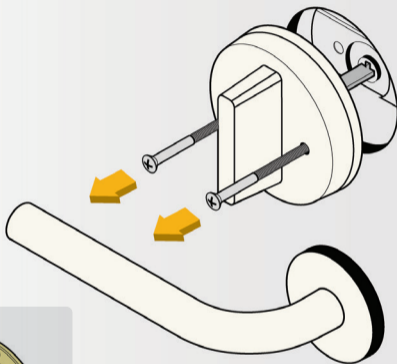

B



Step 3:











Select the correct mounting plate and adapter.

If you know the brand of your deadbolt, please select the correct mounting plate and adapter from the Compatibility Chart on the next page, and then go to **Step 4** (page 18).

If not, go to **Step 3a** (page 16) to find the correct mounting plate and adapter.

If your tailpiece is in a vertical position when the door is unlocked, you will need to remove the keyhole and rotate it so the tailpiece is in a horizontal position before you install.

Standard Deadbolt Compatibility Chart

BRAND	MOUNTING PLATE	ADAPTER
Baldwin - Estate/Images*	1	
Baldwin Reserve/Prestige	3	
Defiant	2	
Emtek	3	
Kwikset*	3	
Omnia**	1	
Schlage***	2	 
Weiser	2	
Weslock	1	

* Baldwin and Kwikset Deadbolts installed before 1997 have unique installation requirements, please contact us at 844-AUGUST1 (284-8781) and we will walk you through installation.

** Compatible only with non-mortise, standard Omnia deadbolts.

*** Commercial grade Schlage B560 deadbolts require supplemental screws. If your Schlage screws are too short please contact us at support@august.com


Step 3a:

Select the correct mounting plate.


- A** Insert the existing screws in the thumb-latch to help you choose the correct mounting plate. If there was a back plate under your thumb-latch, insert the screws into this back plate instead of the thumb-latch.
- B** Slide the mounting plates onto the screws one at a time until you find a mounting plate that allows the screws to fit straight through the holes.

Having trouble selecting the right mounting plate? Try [august.com/installation](https://www.august.com/installation) or call August customer support at 844-AUGUST1 (284-8781)


A

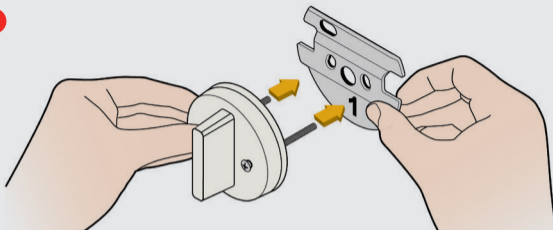

B Compatibility: **YES**



B Compatibility: **NO**



Step 4:


Position the mounting plate.

- A** Remove the backing from the 4 rubber bumpers and place them on the **back side** of the mounting plate (the side that does **not** show a number).
- B** Rotate the mounting plate so the 4 rubber bumpers are between the mounting plate and the door. Remove the screws from the thumb-latch and use them to install the mounting plate over the existing deadbolt tail piece.
- C** **Moderately tighten the screws until the mounting plate is settled against the door. Over-tightening can deform the mounting plate and interfere with the operation of the lock.**


A




Front: **NO**




Back: **YES**



B





C



Step 5:

Position adapter and align mounting plate.





- A** Remove the tape from the key hole, and use your key to turn your deadbolt to the fully **unlocked position**.
- B** If your lock was not in the Compatibility Chart, select the adapter that fits your tail piece. To do this, slide each adapter onto the tail piece. **The correct adapter will have the small nub pointing up.**
- C** Place the correct adapter onto the tail piece with the small nub pointing up. Tighten the screws until they are moderately tight. **Do not over-tighten.** Over-tightening can deform the mounting plate and interfere with the operation of the lock.

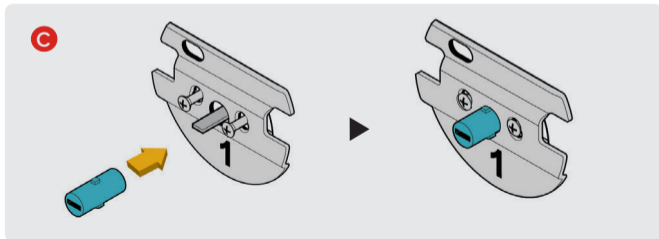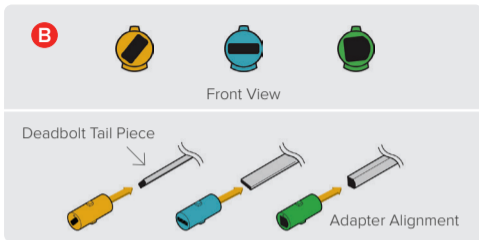

Step 6:

Attach the August Smart Lock.




- A** Insert the adapter into the back of the August Smart Lock, then position the August Smart Lock with the August name badge at the top.
- B** Pull out both side wing latches. Slide the August Smart Lock over tail piece and attach to mounting plate.
Make sure the back of the lock is flush with the door.
- C** To secure the August Smart Lock, clamp down both side wing latches to the mounting plate completely. If the latches are difficult to clamp down, then go back to Step 5C and ensure that the screws have **not been over-tightened**. You may need to loosen them slightly.

A**B****C**

Step 7:

Remove battery tab.

- A** Press down on the August logo located at the bottom of the face plate. The top of the face plate will tilt outward. Grab the face plate and remove.
- B** Holding batteries in place, remove the plastic battery isolation tab. Make sure that the battery is properly seated in its compartment.
- C** Place the face plate back onto the August Smart Lock. Make sure the August logo is located along the bottom of the face plate. The face plate attaches with magnets straight onto the August Smart Lock.

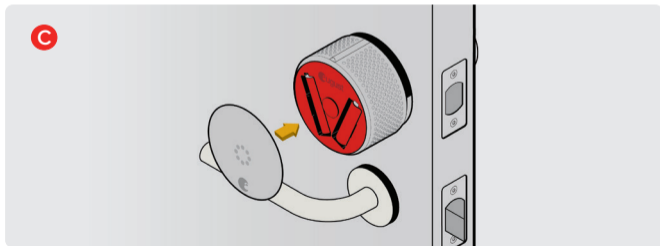

Step 8:

Install August App

Download the App from **august.com/app**

The app will help you create an account and set up your August Smart Lock.

We suggest that you protect your phone with a passcode in case it is lost or stolen.



Questions?

If you have any questions,
call **844-AUGUST1 (284-8781)**
or visit **august.com/support**

Lost your phone? Go to
www.august.com to disable the August app
running on your phone.

©2015 August Home Inc.

080-00075-05